

INSTALLATION GUIDE

STRAPPING FOR PLATES

INSTALLATION

- 1** Pull and cut out required length with an additional 20cm from the spool




- 2** Bend the strap and make a "C" shape and put it through the slots



- 3** Pull through around 20cm of length through the first slot



- 4** Slot through the second slot with the 20cm

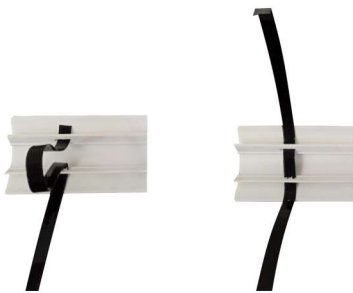

- 5** Repeat for the other side



- 6** Align the plate markers on the desired location on the pipe



- 7** Pull the buckles on the Long side and align it where you have 10cm excess strap on the other side. Bend the strap behind the buckle to secure it



- 8** Thread the short side through the buckles



- 9** Use the tightening tool and start tightening



- 10** Once the strap is firm and tight, cut the excess via the lever and push the remainder upwards



- 11** Clamp the buckle down to secure the straps and repeat on the other side.

